


Mono Perc

DHM-60L9





半片单晶高效组件

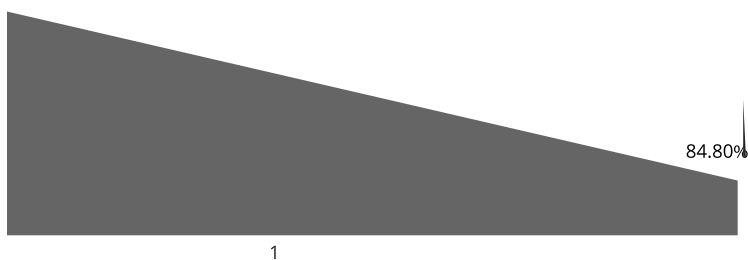

性功率保证

370~380

最大
转换 J



4.0mm², 正350mm/负250mm
(线缆可定制)
120 (6×20)
3.2毫米高透、减反射镀膜钢